

RI-CTS036 Series

Single Phase Mini Split Core Current Transformers



- From 250A to 600A Primary currents
- 5A or 1A Secondary output
- 57.5mm width
- 36mm cable aperture
- Integral 1 metre cable
- Snap together housing
- Compact design
- Indication of primary current flow (arrow on case body)

Ø 36mm

Product Description

The RI-CTS036 Series forms part of a large family of split core single phase moulded case current transformers from Rayleigh Instruments.

These transformers are suitable for monitoring current flow in commercial, industrial or utility applications. They are designed to connect any standard metering or relay product requiring a 5A or 1A output and are available with Primary current input ranges from 250A to 600A.

The RI-CTS036 Series have been designed for ease of installation into existing plants where removal of busbars or cable lugs is impractical. They also have clear markings moulded into the case to indicate the correct direction of primary current flow to minimise installation errors.

Parameters

Primary Current A	Burden			Order Code
	Class 0.5 VA	Class 1 VA	Class 3 VA	
250	-	1.5	-	0250
300	-	1.5	-	0300
400	-	1.5	-	0400
600	-	1.5	-	0600

Available with 5A or 1A Secondary

Rated Standard

Rated Primary Current (I_{pr})	250...600A
Frequency Range (f_R)	47...63Hz
Rated continuous over current (I_{cth})	1.2 x rated current
Rated short time thermal current (I_{th})	$\leq 60 \times I_{pr}$
Rated dynamic current (I_{dyn})	2.5 I_{th}
Instrument security factor (FS)	≤ 5
Rated Secondary output	5A or 1A
Accuracy class	Class 1 to IEC/EN61869-2

Insulation

Insulation type	Dry transformer, air insulation
Highest voltage (U_m)	0.72kV r.m.s.
Rated insulation level	3kV r.m.s. 50Hz/1 min

Environmental Conditions

Reference temperature	23°C \pm 1°C
Nominal temperature range	-5°C...40°C
Limit temperature range for storage	-40°C...85°C
Relative humidity	$\leq 85\%$ non condensing
Altitude	≤ 1000 meters


Housing

Housing material	Fire resistant UL94-V0
Protection degree (IEC/EN60529)	IP40 housing, Terminals IP20
Mounting	Snap together housing
Weight	≥ 450 g

Connections

Primary winding	Passing cable
Secondary winding	Integral 1 metre cable (other cable lengths available on request - see table below)
Secondary Connections	Red - S1 (K) / Black - S2 (L)

Dimensions (mm)

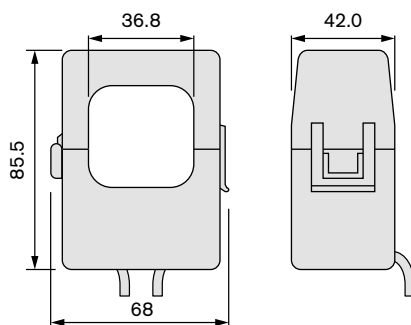

Information Required with Order

Build your order number - example	RI-CTS036 5A 0300 G 01
Model	
Secondary Current - 5A or 1A	
Primary Current Range - See Parameters Table 'Order Code'	
Housing Colour : G = Grey	
Cable Length : 01 = 1 meter (standard). 03 = 3, 07 = 7 and 10 = 10 meter (to order only).	